


100 mm Angular Adapters

AC100

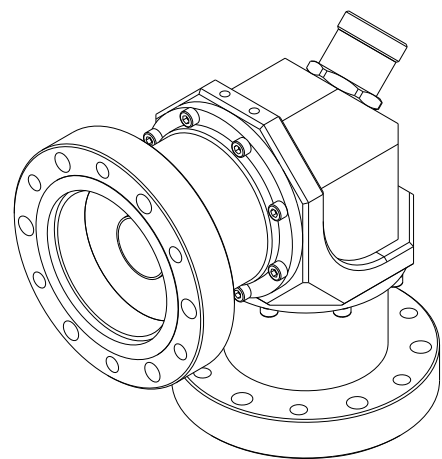

FEATURES

- Interchangeable Connector System
- EIA and JEITA Standard Compliant

3+1/8" (WX-77D) to 3+1/8" (WX-77D)

SPECIFICATIONS	
Code / Revision	D-AC100 / A
Return Loss ⁽¹⁾	> 40 dB (VSWR < 1.02)
Environmental Conditions	-5 to +55°C (+23 to +131°F), IP60
Connection A ⁽²⁾	3+1/8" (WX-77D) / NAX77D Flange
Connection B ⁽²⁾	3+1/8" (WX-77D) / NAX77D Flange

⁽¹⁾ @ 800 MHz ⁽²⁾ Inner Connections not included (Flanges only)

3+1/8" (WX-77D) to 1+5/8" (WX-39D)

SPECIFICATIONS	
Code / Revision	D-AC100 / A
Return Loss ⁽¹⁾	> 40 dB (VSWR < 1.02)
Environmental Conditions	-5 to +55°C (+23 to +131°F), IP60
Connection A ⁽²⁾	3+1/8" (WX-77D) / NAX77D Flange
Connection B ⁽²⁾	1+5/8" (WX-39D) Flange

⁽¹⁾ @ 800 MHz ⁽²⁾ Inner Connections not included (Flanges only)