


150 mm Angular Adapters

AC150

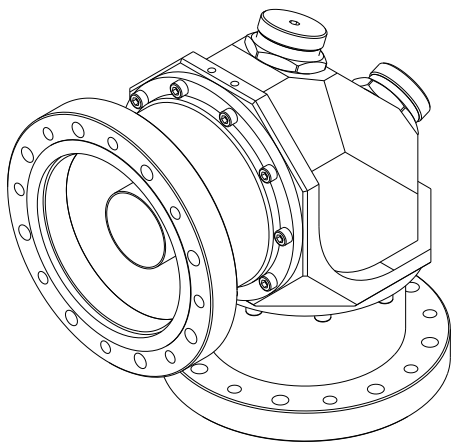

FEATURES

- Interchangeable Connector System
- EIA and JEITA Standard Compliant

RL-120 (WX-120D) - 6+1/8" (WX-152D) to
RL-120 (WX-120D) - 6+1/8" (WX-152D)

SPECIFICATIONS

Code / Revision	D-AC150 / A
Return Loss ⁽¹⁾	> 40 dB (VSWR < 1.02)
Environmental Conditions	-5 to +55°C (+23 to +131°F), IP60
Connection A ⁽²⁾	RL-120 (WX-120D) Flange 6+1/8" (WX-152D) Flange
Connection B ⁽²⁾	RL-120 (WX-120D) Flange 6+1/8" (WX-152D) Flange

⁽¹⁾ @ 800 MHz ⁽²⁾ Inner Connections not included (Flanges only)

RL-120 (WX-120D) - 6+1/8" (WX-152D) to 4+1/2"

SPECIFICATIONS

Code / Revision	D-AC150 / A
Return Loss ⁽¹⁾	> 40 dB (VSWR < 1.02)
Environmental Conditions	-5 to +55°C (+23 to +131°F), IP60
Connection A ⁽²⁾	RL-120 (WX-120D) Flange 6+1/8" (WX-152D) Flange
Connection B ⁽²⁾	4+1/2" Flange

⁽¹⁾ @ 800 MHz ⁽²⁾ Inner Connections not included (Flanges only)