


64 mm Angular Adapters

AC64

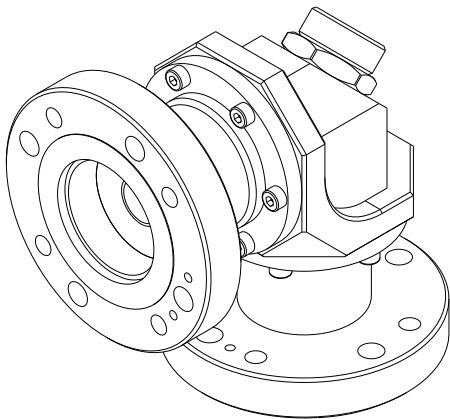

FEATURES

- Interchangeable Connector System
- EIA and JEITA Standard Compliant

1+5/8" (WX-39D) to 1+5/8" (WX-39D)

SPECIFICATIONS

Code / Revision	D-AC64 / A
Return Loss ⁽¹⁾	> 40 dB (VSWR < 1.02)
Environmental Conditions	-5 to +55°C (+23 to +131°F), IP60
Connection A ⁽²⁾	1+5/8" (WX-39D) Flange
Connection B ⁽²⁾	1+5/8" (WX-39D) Flange

⁽¹⁾ @ 800 MHz ⁽²⁾ Inner Connections not included (Flanges only)

1+5/8" (WX-39D) to N, 7-16, 7/8" (WX-20D)

SPECIFICATIONS

Code / Revision	D-AC64 / A
Return Loss ⁽¹⁾	> 40 dB (VSWR < 1.02)
Environmental Conditions	-5 to +55°C (+23 to +131°F), IP60
Connection A ⁽²⁾	1+5/8" (WX-39D) Flange
Connection B ⁽²⁾	7/8" (WX-20D) Flange

⁽¹⁾ @ 800 MHz ⁽²⁾ Inner Connections not included (Flanges only)