
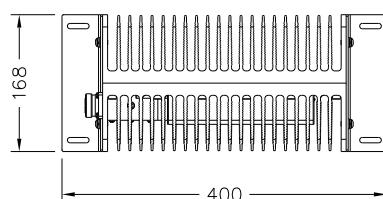
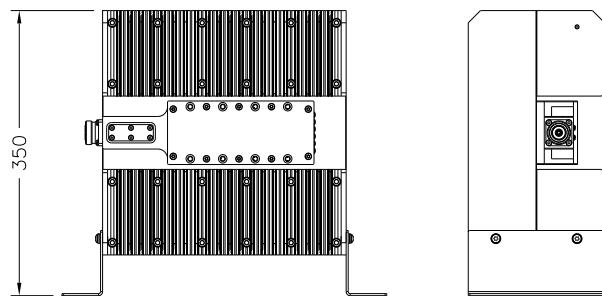


1.4 kW Dry Load (With Heat Sink)

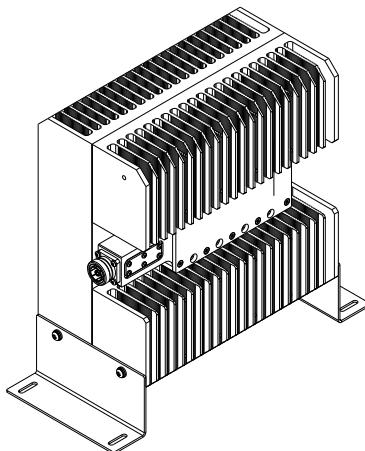

FEATURES

- With Heat Sink
- BeO Free

OPTIONS

- Integrated Directional Coupler

SPECIFICATIONS

Code / Revision	C-DT300HC / A
Max RMS Input Power ⁽¹⁾	1.4 kW
Frequency Range	DC-862 MHz
Return Loss / VSWR	> 26 dB / < 1.11
Max Operating Temperature (Body)	120°C (248°F)
Environmental Conditions	-5 to +55°C (+23 to +131°F), IP60
Dimensions / Weight ⁽²⁾	400x168x350 mm / 18.0 kg (39.6 lb.)
Connectors ⁽³⁾	1x 32 mm Input D-PC32E 7-16 Female (Default) D-PC32H 7/8" EIA Flange
Options	O-XDC.01 SMA Integrated Directional Coupler O-XDC.02 N Integrated Directional Coupler

⁽¹⁾ @25°C (77°F) Ambient Temperature ⁽²⁾ Default configuration ⁽³⁾ Other Connectors available

