
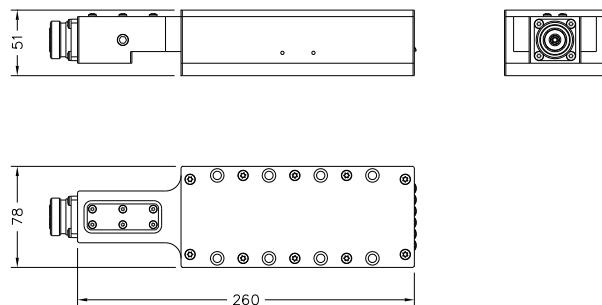


## 3 kW Dry Load (For Integration)

DT300SC

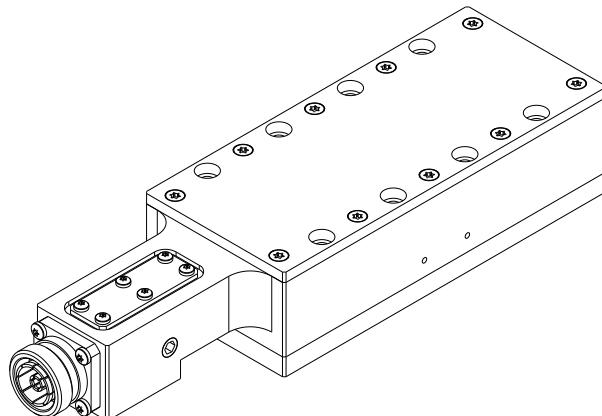

## FEATURES

- For Integration
- BeO Free

## OPTIONS

- Integrated Directional Coupler

## SPECIFICATIONS

Code / Revision	C-DT300SC / A
Max RMS Input Power <sup>(1)</sup>	3.0 kW
Frequency Range	DC-862 MHz
Return Loss / VSWR	> 26 dB / < 1.11
Max Operating Temperature (Body)	100°C (212°F)
Environmental Conditions	-5 to +55°C (+23 to +131°F), IP60
Dimensions / Weight <sup>(2)</sup>	260x78x51 mm / 2.5 kg (5.5 lb.)
Connectors <sup>(3)</sup>	<b>1x 32mm Input</b> D-PC32E 7-16 Female (Default) D-PC32H 7/8" EIA Flange
Options <sup>(3)</sup>	O-XDC.01 SMA Integrated Directional Coupler O-XDC.02 N Integrated Directional Coupler

<sup>(1)</sup> @100°C (212°F) Body Temperature / with External Cooling    <sup>(2)</sup> Default configuration<sup>(3)</sup> Other Connectors/Options available