
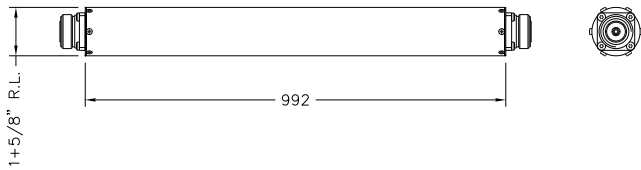


VHF B.III Lowpass Filter

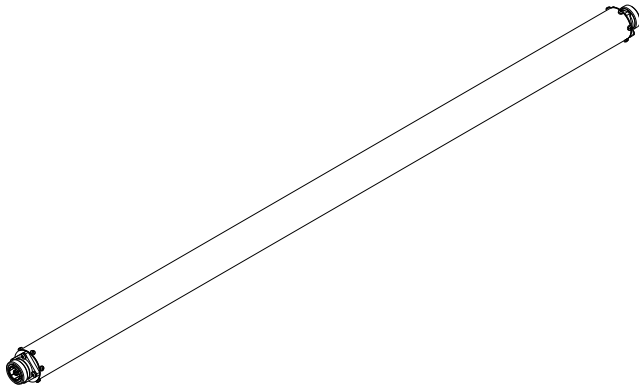

FEATURES

- Modular Connector System
- 10-Year Warranty

SPECIFICATIONS

Code / Revision	A-LC39B / A	
Lowpass Band	174-240 MHz	
No. of Poles	11-Pole	
Max RMS Input Power ⁽³⁾	2.5 kW	(230 MHz)
Insertion Loss	< 0.04 dB	(230 MHz)
Return Loss (VSWR)	> 30 dB (1.07)	
Selectivity	> 34 dB (348 to 1000 MHz)	
Max Operating Temperature (Body)	65 °C (149 °F)	
Environmental Conditions	-5 to +55 °C (+23 to +131 °F), IP60	
Dimensions / Weight ⁽¹⁾	992 mm, 1+5/8" / 1.5 kg	
Connectors ⁽⁸⁾	2x 32 mm	Input; Output
	D-PC32C	N Female
	D-PC32E	7-16 Female (Default)
	D-PC32G	7/8" <i>FastLine</i> Socket
	D-PC32H	7/8" <i>FastLine</i> Flange
	D-PC32J	1+5/8" <i>FastLine</i> Socket
	D-PC32K	1+5/8" <i>FastLine</i> Flange

⁽¹⁾ Approximate, default configuration ⁽³⁾ Altitude < 1500 m (4,900 ft.), Free air, Ambient temp. < 30 °C (86 °F) ⁽⁸⁾ Other Connectors available