



## VHF B.III Lowpass Filter

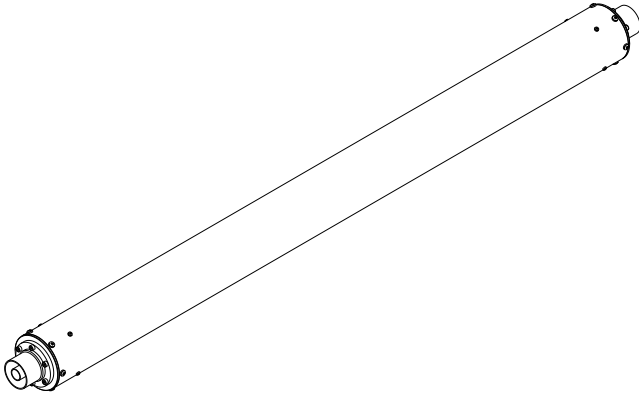

## FEATURES

- Modular Connector System
- 10-Year Warranty

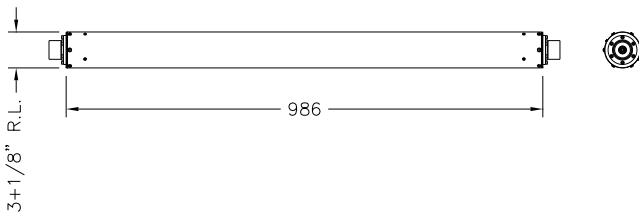

## SPECIFICATIONS

Code / Revision	A-LC77B / A	
Lowpass Band	174-240 MHz	
No. of Poles	11-Pole	
Max RMS Input Power <sup>(3)</sup>	11.9 kW	(230 MHz)
Insertion Loss	< 0.02 dB	(230 MHz)
Return Loss (VSWR)	> 30 dB	(1.07)
Selectivity	> 34 dB	(348 to 1000 MHz)
Max Operating Temperature (Body)	65 °C (149 °F)	
Environmental Conditions	-5 to +55 °C (+23 to +131 °F), IP60	
Dimensions / Weight <sup>(1)</sup>	986 mm, 3+1/8" / 4.9 kg	
Connectors <sup>(8)</sup>	<b>2x 64 mm</b>	<b>Input; Output</b>
	D-PC64J	1+5/8" <i>FastLine</i> Socket (Default)
	D-PC64K	1+5/8" <i>FastLine</i> Flange
	D-PC64M	3+1/8" <i>FastLine</i> Socket
	D-PC64N	3+1/8" <i>FastLine</i> Flange

<sup>(1)</sup> Approximate, default configuration <sup>(3)</sup> Altitude < 1500 m (4,900 ft.), Free air, Ambient temp. < 30 °C (86 °F) <sup>(8)</sup> Other Connectors available