


1+5/8" Lowpass Filter

LP39B

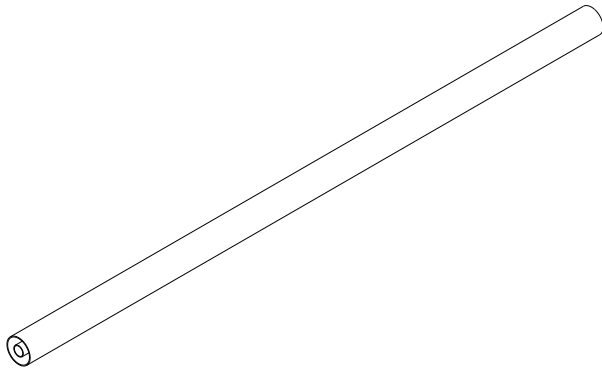


FEATURES

- 11-Pole
- Rigid Line Design

OPTIONS

- Flange

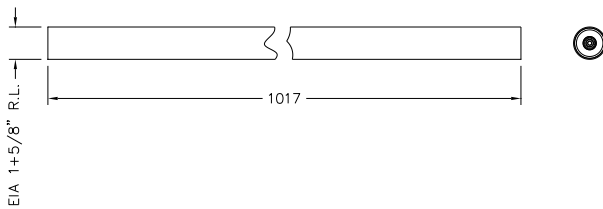

SPECIFICATIONS

Code / Revision	C-LP39B / A
Frequency Range	DC to 240 MHz
Order	11-Pole
Max RMS Input Power	3.5 kW @ 170 MHz 3.25 kW @ 200 MHz
Return Loss / VSWR	> 30 dB / < 1.07
Selectivity	> 34 dB @ 348 MHz > 60 dB @ 450 to 950 MHz
Max Operating Temperature (Body)	65°C (149°F)
Environmental Conditions	-5 to +55°C (+23 to +131°F), IP60
Dimensions / Weight ⁽¹⁾	1017 mm, EIA 1+5/8" / 1.5 kg (3.3 lb.)
Interface	1+5/8" Rigid Line
Options	O-TLP39.01 1+5/8" EIA FastLine Flange

⁽¹⁾ Default configuration