
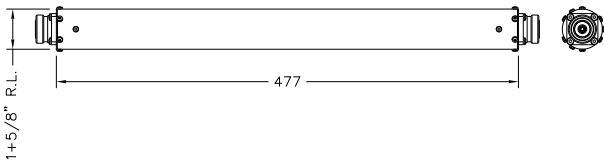


UHF (800 MHz) Lowpass Filter

LP39CRC

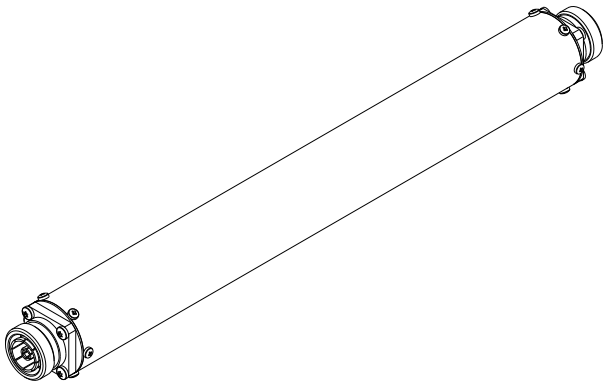

FEATURES

- Modular Connector System
- 800 MHz Cut-Off
- 5G n1-n76 Protection
- 10-Year Warranty

SPECIFICATIONS

Code / Revision	A-LP39CRC / A	
Lowpass Band	470-800 MHz	
No. of Poles	15-Pole	
Max RMS Input Power ⁽³⁾	1.7 kW	(700 MHz)
	1.2 kW	(800 MHz)
Insertion Loss	< 0.05 dB (800 MHz)	
Return Loss (VSWR)	> 30 dB (1.07)	
Selectivity	> 29 dB 940 to 2600MHz	
Max Operating Temperature (Body)	65 °C (149 °F)	
Environmental Conditions	-5 to +55 °C (+23 to +131 °F), IP60	
Dimensions / Weight ⁽¹⁾	477 mm, 1+5/8" / 1.6 kg (3.5 lb.)	
Connectors ⁽⁸⁾	2x 32 mm	Input; Output
	D-PC32E	7-16 Female (Default)
	D-PC32F	7-16 Male
	D-PC32G	7/8" FastLine Socket
	D-PC32H	7/8" FastLine Flange
	D-PC32I	7/8" FastLine Plug

⁽¹⁾ Default configuration ⁽³⁾ Altitude < 1500 m (4,900 ft.), Free air, Ambient temp. < 30 °C (86 °F)
⁽⁸⁾ Other Connectors available