
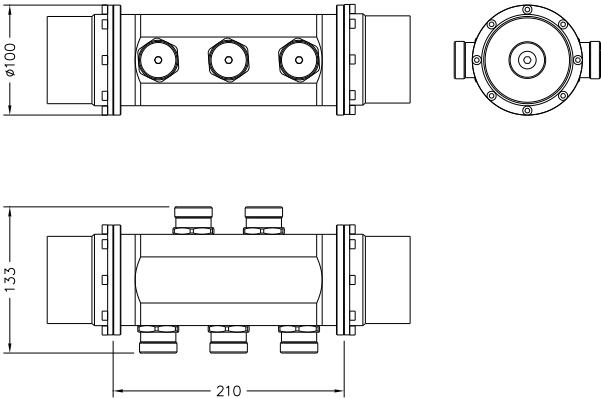


3+1/8" Matching Line

ML77C

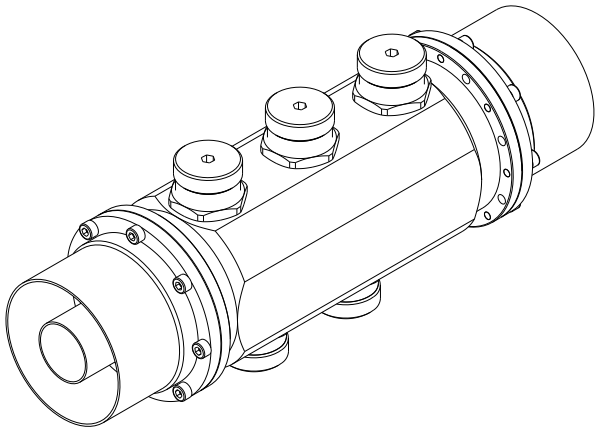

FEATURES

- 5 Matching Sections
- Interchangeable Connector System

SPECIFICATIONS

Code / Revision	C-ML77C / A
Frequency Range	400-800 MHz
Max RMS Output Power	21.0 kW
Matching Capability	from 18 dB R.L. (VSWR < 1.29) to 26 dB R.L. (VSWR < 1.11)
No. of sections	5
Max Operating Temperature (Body)	65°C (149°F)
Environmental Conditions	-5 to +55°C (+23 to +131°F), IP60
Dimensions / Weight ⁽¹⁾	210x133x100 mm / 2.8 kg (6.2 lb.)
Connectors ⁽²⁾	2x 100 mm Input; Output D-PC100M 3+1/8" FastLine Socket (Default) D-PC100N 3+1/8" EIA FastLine Flange D-PC100O 3+1/8" FastLine Plug

⁽¹⁾ Default configuration ⁽²⁾ Other Connectors available