
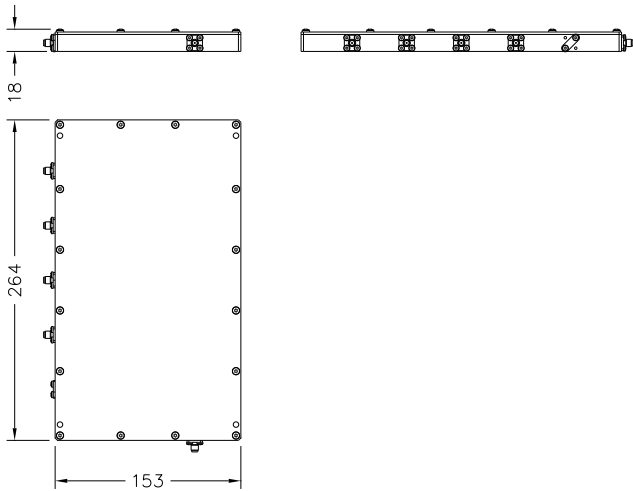


UHF 4-Way Progressive Splitter

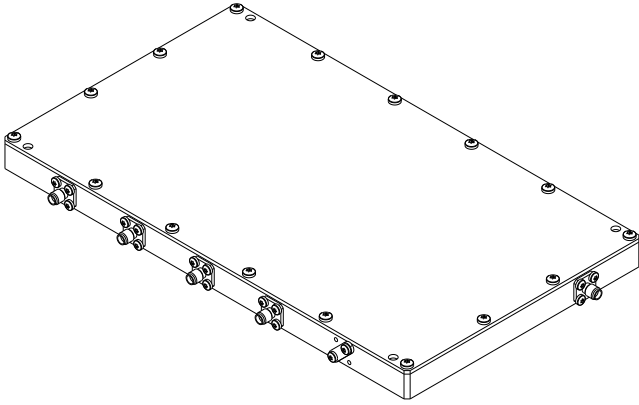

FEATURES

- Progressive Power-Combination
- Flat Frequency Response
- Matched Multicouplers: MH-Series
- 10-Year Warranty

SPECIFICATIONS

| | |
|------------------------------------|--|
| Code / Revision | C-PS4C / B |
| Matched Multicoupler | C-MH4P60C |
| Frequency Range | 470-800 MHz |
| Max RMS Input Power ⁽³⁾ | 5.0 W |
| | 10.0 W (With N Female Connectors) |
| Insertion Loss | < 8.5 dB |
| Return Loss (VSWR) | > 20 dB (1.22) |
| Isolation | > 20 dB |
| Amplitude Balance | < ±0.25 dB |
| Phase Response | Complementary to MH4P60C |
| Max Operating Temperature (Body) | 65 °C (149 °F) |
| Environmental Conditions | -5 to +55 °C (+23 to +131 °F), IP60 |
| Dimensions / Weight ⁽¹⁾ | 153x264x18 mm / 1.1 kg |
| Connectors ⁽⁶⁾ | 1x 12 mm Input D-PC12A SMA Female (Default) D-PC12C N Female 4x 12 mm Outputs D-PC12A SMA Female (Default) D-PC12C N Female |

⁽¹⁾ Approximate, default configuration ⁽³⁾ Altitude < 1500 m (4.900 ft.), Free air, Ambient temp. <30 °C (86 °F) ⁽⁶⁾ Other Connections available

