

UHF 8-Pole 110 mm Balanced Combiner

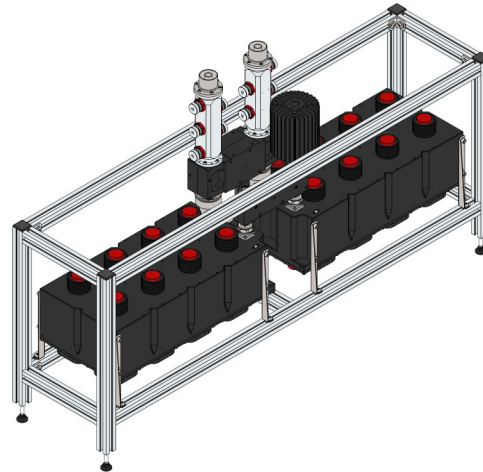
DM8D110C

FEATURES

- *DualCross*: Double Cross Coupling
- Adjacent-Channel Combination
- Full-Band Tunability
- Temperature Stabilization
- DC-Short
- Modular Connector System
- Modular Frame System
- 10-Year Warranty

OPTIONS

- Heat Sinks


DVB-T2
 TERRESTRIAL

ATSC
 ADVANCED TELEVISION
 SYSTEMS COMMITTEE

ISDB-T

SPECIFICATIONS

Code / Revision	B-DM8D110C/n / C <i>n</i> : Number of Filtered Inputs		
No. of Poles / Cavity Size	8-Pole <i>DualCross</i> / 110 mm		
Frequency Range / Bandwidth	470-862 MHz / 6-8 MHz		
Temperature Stability	< 2 kHz/K		
Max Operating Temperature (Body)	65°C (149°F)		
Environmental Conditions	-5 to +55°C (+23 to +131°F), IP60		
Dimensions / Weight ⁽¹⁾	n=1: 1208x294x681 mm / 51 kg n≥2: 1208x(294·n)x681 mm / 51·n kg		
Links	1+5/8" Rigid Line		
Connectors (NB Inputs) ⁽²⁾	1x 32 mm D-PC32C N Female D-PC32E 7-16 Female (Default) D-PC32G 7/8" FastLine Socket D-PC32H 7/8" FastLine Flange D-PC32J 1+5/8" FastLine Socket D-PC32K 1+5/8" FastLine Flange		
Connectors (WB Input; Output) ⁽²⁾	2x 64 mm D-PC64J 1+5/8" FastLine Socket (Default) D-PC64K 1+5/8" FastLine Flange D-PC64M 3+1/8" FastLine Socket D-PC64N 3+1/8" FastLine Flange		
Options ⁽²⁾	O-HFC.08 Heat Sinks		
TUNING	DVB-T2 / DVB T (8 MHz)	ATSC 3.0 / ATSC 1.0 (6 MHz)	ISDB-T (6 MHz)
Mask	Critical	Increased Attenuation	Critical
Tuning Code	T-8D.06 / T-8D.01	T-8D.05	T-8D.04
Max RMS NB Input Power ^(3,4)	(700 MHz) Default 2.3 kW Heat Sinks 3.0 kW	(700 MHz) Default 2.1 kW Heat Sinks 2.8 kW	(700 MHz) Default 1.8 kW Heat Sinks 2.5 kW
Max RMS Output Power ⁽³⁾	7.0 kW	7.0 kW	7.0 kW
NB Insertion Loss ⁽⁴⁾	(470 MHz) (700 MHz) C.F. < 0.45 dB < 0.54 dB ±3.885 MHz < 2.70 dB < 3.24 dB ±3.805 MHz < 1.85 dB < 2.22 dB + 0.06·n dB	(470 MHz) (700 MHz) C.F. < 0.56 dB < 0.67 dB ±2.916 MHz < 1.17 dB < 1.41 dB ±2.69 MHz < 0.86 dB < 1.03 dB + 0.06·n dB	(470 MHz) (700 MHz) C.F. < 0.61 dB < 0.74 dB ±2.79 MHz < 1.53 dB < 1.84 dB + 0.06·n dB
WB Insertion Loss ⁽⁴⁾	< 0.06·n dB	< 0.06·n dB	< 0.06·n dB
Selectivity	C.F. ± 4.2 MHz > 14 dB / > 15 dB C.F. ± 6.0 MHz > 30 dB C.F. ± 12.0 MHz > 51 dB	C.F. ± 3.5 MHz > 15 dB C.F. ± 6.0 MHz > 45 dB C.F. ± 9.0 MHz > 63 dB	C.F. ± 3.15 MHz > 15 dB C.F. ± 4.5 MHz > 31 dB C.F. ± 9.0 MHz > 61 dB
Harmonic Attenuation ⁽⁶⁾	> 50 dB up to 1.1 GHz	> 50 dB up to 1.1 GHz	> 50 dB up to 1.1 GHz
NB Return Loss (VSWR) ⁽⁴⁾	> 26 dB (1.11)	> 26 dB (1.11)	> 26 dB (1.11)
WB Return Loss (VSWR) ⁽⁴⁾	Single Ch. > 30 dB (1.07) All band > 26 dB (1.11)	Single Ch. > 30 dB (1.07) All band > 26 dB (1.11)	Single Ch. > 30 dB (1.07) All band > 26 dB (1.11)
Isolation Between Inputs ⁽⁴⁾	> 30 dB	> 30 dB	> 30 dB
Group Delay Variation ⁽⁴⁾	< 700 ns	< 460 ns	< 700 ns

⁽¹⁾ Approximate, default configuration ⁽²⁾ Other Connector, Options, Tunings available ⁽³⁾ Altitude < 1500 m (4,900 ft.), Free air, Ambient temp. < 30 °C (86 °F) ⁽⁴⁾ Non-adjacent channels ⁽⁶⁾ Up to 3rd harmonic atten. with LP/LC Series Lowpass Filter