

UHF (608 MHz) 1+5/8" Lowpass Filter


LP39XC

FEATURES

- 608 MHz Cut-Off
- 5G n1-n76 Protection
- 4G Protection
- Rigid Line Interface
- 10-Year Warranty

OPTIONS

- Flanges

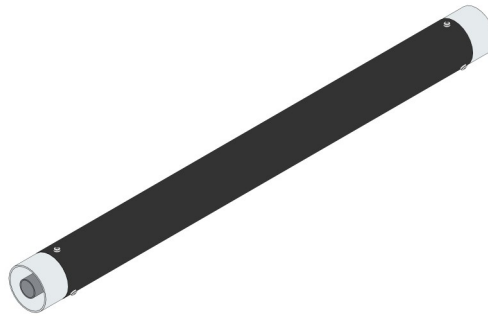

SPECIFICATIONS

Code / Revision	A-LP39XC / A
Lowpass Band	470-608 MHz
No. of Poles	13-Pole
Max RMS Input Power ⁽³⁾	1.7 kW (608 MHz)
Insertion Loss	< 0.05 dB (608 MHz)
Return Loss (VSWR)	> 30 dB (1.07)
Selectivity	> 60 dB (940 to 2600 MHz)
Max Operating Temperature (Body)	65 °C (149 °F)
Environmental Conditions	-5 to +55 °C (+23 to +131 °F), IP60
Dimensions / Weight ⁽¹⁾	521 mm, 1+5/8" / 0.8 kg
Interface	1+5/8" Rigid Line
Options	O-TLP39.01 1+5/8" <i>FastLine</i> Flange

⁽¹⁾ Approximate, default configuration ⁽³⁾ Altitude < 1500 m (4.900 ft.), Free air, Ambient temp. < 30 °C (86 °F)